

GE
Lighting

Tetra[®] miniMAX

LED Lighting System

Wet or dry—our **brightest** solution
for **small** channel letters



imagination at work

Tetra® miniMAX

Maximized Output. Minimized Expense.

Tetra® miniMAX—the remarkable LED system designed for small channel letters as shallow as 1.5 inches in depth delivers incredibly uniform light, installs easily and operates efficiently. The **Tetra® miniMAX** is now IP66 and UL wet rated which makes it more robust and reliable even under wet weather.

Working closely with sign builders and owners, we've refined our design to improve performance while decreasing the amount of product required, further reducing installation and material costs.




Powerful OptiLens™

Tetra® miniMAX features **OptiLens™** a patented technology that captures otherwise wasted light and redirects it towards the illuminated surface with impressive uniformity. It optimizes each LED—which enables wider stroke spacing—reducing the amount of material needed per sign while helping protect the LED against moisture, humidity, damage and corrosion.

Tetra® miniMAX Wet Location Rated

Now there's a miniMAX solution for **wet locations** where saturation with water or other liquids is likely. Integrating all the same performance features of miniMAX, the miniMax wet rated is IP66 and UL wet rated. It contains an added over molded design that protects against water ingress, dust and damage, and a special module top surface to eliminate water retention —no separate enclosure is required.

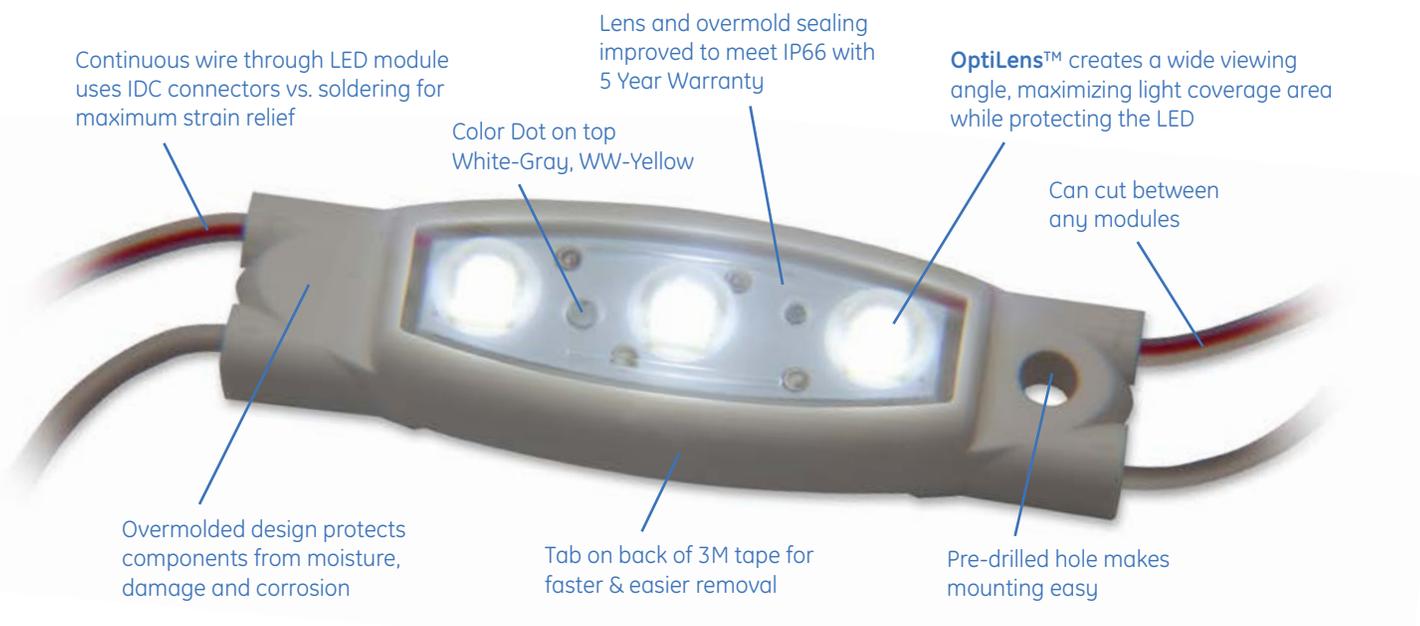



a product of
ecomagination™

Can cut product required almost in half

Many LED systems use about 13 LED modules in 2 rows to fill a capitol "T" channel letter that's 2 feet high.

Use one row, not two. Tetra® miniMAX stretches stroke spacing to an impressive 7 inches in a 3-inch depth channel while maintaining impressive light uniformity on the sign face. It protects your customers' brand image while reducing product costs and saving you installation time.

Total GE Reliability

To ensure every Tetra® miniMAX installation will operate brilliantly for years, we perform the most extensive, stringent testing in the industry. Rather than relying solely on test data from LED suppliers, we test the LED, water and dust ingress protection, sub-system and complete system at our in-house and independent laboratories around the world. Validation of our designs, components, products and processes include high-temperature, high-humidity and accelerated life testing.

Components

SKU	Description	Package Quantity
GEMM71-W1	Tetra miniMAX 7100K	100 ft (30.48 m)/box (250 modules)
GEMM50-W1	Tetra miniMAX 5000K	100 ft (30.48 m)/box (250 modules)
GEMM41-W1	Tetra miniMAX 4100K	100 ft (30.48 m)/box (250 modules)
GEMM32-W1	Tetra miniMAX 3200K	100 ft (30.48 m)/box (250 modules)
GEMMRD-W1	Tetra miniMAX Red	100 ft (30.48 m)/box (250 modules)
GEMMBL-W1	Tetra miniMAX Blue	100 ft (30.48 m)/box (250 modules)
GEMMGL-W1	Tetra miniMAX Green	100 ft (30.48 m)/box (250 modules)
GEMMPO-W1	Tetra miniMAX Orange	100 ft (30.48 m)/box (250 modules)
9409	18 AWG Supply Wire (0.82 mm ²)	500 ft /spool (152.4 m)
191600041	22-14 AWG Twist-On Wire Connectors (0.33 - 2.08 mm ²)	500/ PK
192160004	18-14 AWG In-line Connectors (IDC) (0.82-2.08 mm ²)	500/ PK

Technical Specifications

Color	Wavelength	Typical Brightness (lumens/module)	Typical Brightness (lumens/ft.)	Energy Consumption (Strip/Module)	Energy Consumption (System/Module)	Power Supply Loading	Viewing Angle
Tetra miniMAX White	7100K, 5000K	36	90	0.32	0.38	68ft (170 modules)	150
Tetra miniMAX Warm White	4100K, 3200K	34, 30	85, 75	0.32	0.38	68ft (170 modules)	150
Tetra miniMAX Red	625nm	11	27	0.39	0.47	60ft. (150 modules)	150
Tetra miniMAX Blue	467nm	8	19	0.39	0.47	60ft. (150 modules)	150
Tetra miniMAX Green	530nm	24	60	0.39	0.47	60ft. (150 modules)	150
Tetra miniMAX Orange	606nm	19	48	0.48	0.59	60ft. (150 modules)	150

Specification Item

Specification

LEDs/ Module	3															
Module/ft.	2.5															
Cutting Resolution	Cut on wire between every module															
Power Supply	GEPS12-25U-NA Input: 90-264VAC; Output: 12VDC GEPS12-60U-NA Input: 108-305VAC; Output: 12VDC GEPS12-60-GL Input: 108-305VAC; Output: 12VDC GEPS12W-60 Input: 90-264VAC; Output: 12VDC GEPS12D-60U Input: 90-305VAC; Output: 12VDC GEPS12-180U-NA Input: 90-305VAC; Output: 12VDC															
Maximum Supply Wire Limits	<table border="1"> <thead> <tr> <th>60W, 80W, 100W, 180W</th> <th>25W</th> <th>Supply Wire Gauge</th> </tr> </thead> <tbody> <tr> <td>20 ft. (6.1 m)</td> <td>120 ft. (36.6 m)</td> <td>18AWG/0.82mm² supply wire - 9409</td> </tr> <tr> <td>25 ft. (7.6 m)</td> <td></td> <td>16AWG/1.31mm² supply wire</td> </tr> <tr> <td>35 ft. (10.6 m)</td> <td></td> <td>14AWG/2.08mm² supply wire</td> </tr> <tr> <td>40 ft. (12.1 m)</td> <td></td> <td>12AWG/3.31mm² supply wire</td> </tr> </tbody> </table> <p>Wiring to be installed in accordance with Article 725 of the National Electric code (NEC).</p>	60W, 80W, 100W, 180W	25W	Supply Wire Gauge	20 ft. (6.1 m)	120 ft. (36.6 m)	18AWG/0.82mm ² supply wire - 9409	25 ft. (7.6 m)		16AWG/1.31mm ² supply wire	35 ft. (10.6 m)		14AWG/2.08mm ² supply wire	40 ft. (12.1 m)		12AWG/3.31mm ² supply wire
60W, 80W, 100W, 180W	25W	Supply Wire Gauge														
20 ft. (6.1 m)	120 ft. (36.6 m)	18AWG/0.82mm ² supply wire - 9409														
25 ft. (7.6 m)		16AWG/1.31mm ² supply wire														
35 ft. (10.6 m)		14AWG/2.08mm ² supply wire														
40 ft. (12.1 m)		12AWG/3.31mm ² supply wire														
Operating Environment	-40 °C to + 60 °C															
Module Dimensions (h x w x l)	0.37 x 0.72 x 2.27 in															
Sign Dimensions	For best results, recommended sign depth is 1.5 inches (38mm) or greater															
Warranty	GE offers a limited system warranty of up to five (5) years															
LED Module Certifications	UL Recognized #E219167, UL Classified #E229508, CE, RCM, RoHS, IP66 wet location rated															



www.gelighting.com

GE and the GE Monogram are trademarks of the General Electric Company. All other trademarks are the property of their respective owners. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions. GE Lighting and GE Lighting Solutions, LLC are businesses of the General Electric Company. © 2015 GE.

SIGN099 (Rev 08/31/15)